

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
22 August 2002 (22.08.2002)

PCT

(10) International Publication Number
WO 02/065264 A1

(51) International Patent Classification⁷: G06F 1/32, 13/10

Wayne; 8 Litchford Road, Chapel Hill, NC 27514 (US).
YAMAMOTO, Osamu; 6-28-21, Minami-Rinkan, Yamato-shi, Kanagawa-Pre 242-0006 (JP).

(21) International Application Number: PCT/US01/47259

(22) International Filing Date:
11 December 2001 (11.12.2001)

(74) Agent: **NEFF, Daryl, K.**; International Business Machines Corporation, Dept. 18G/Bldg. 300-482, 2070 Route 52, Hopewell Junction, NY 12533-6531 (US).

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/263,007 18 January 2001 (18.01.2001) US
09/802,659 9 March 2001 (09.03.2001) US

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.


(71) Applicant: **INTERNATIONAL BUSINESS MACHINES CORPORATION** [US/US]; New Orchard Road, Armonk, NY 10504 (US).

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors: **COHEN, Mark, Evan**; 101 Warley Circle, Cary, NC 27513 (US). **LOEBACH, James, Christopher**; 8704 Deerland Grove Drive, Raleigh, NC 27709 (US). **MUTI, Carl, Joseph, Jr.**; 5315 Balmy Dawn Court, Raleigh, NC 27613 (US). **STUDWELL, Thomas**,

[Continued on next page]

(54) Title: POWER MANAGING IN A SYSTEM HAVING INTERNAL USB HUB

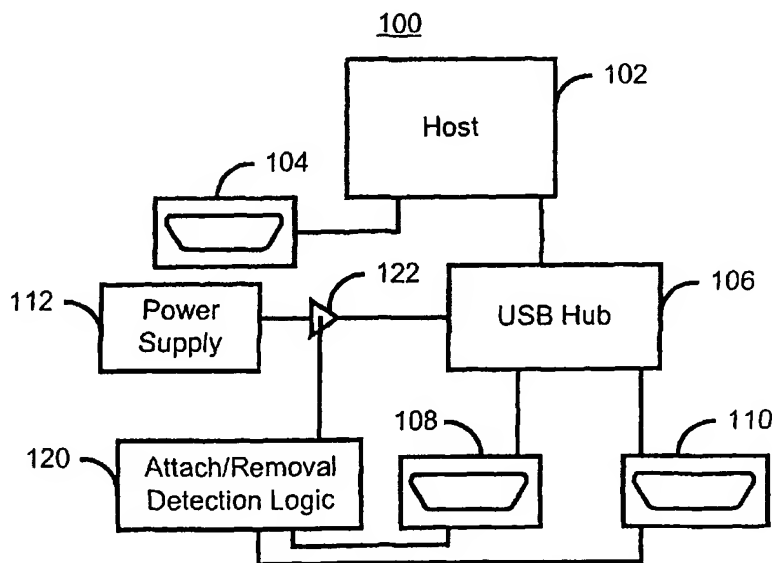

(57) Abstract: A method and system for managing power in a computer system is disclosed. The computer system (100) includes a host (102). The method and system include providing a Universal Serial Bus (USB) hub (106), at least one USB connector (104, 108, 110) and attach/removal detection logic (120). The at least one USB connector is coupled with the USB hub. The attach/removal detection logic is coupled with the USB hub. The attach/removal detection logic determines whether a USB device is connected to the at least one USB connector, logically decouples the USB hub from the host if the USB device is not connected to the at least one USB connector and logically couples the USB hub to the host if the USB device is connected to the at least one USB connector.

WO 02/065264 A1**Published:**

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

WO 02/065264

PCT/US01/47259

POWER MANAGING IN A SYSTEM HAVING INTERNAL USB HUB**Technical Field**

5 The present invention relates to computer systems, and more particularly to a method and system for managing power in a system having an internal USB hub.

Background Art

10 Universal Serial Bus ("USB") connections are of increasing popularity in computer systems. Figure 1 depicts a conventional computer system 10 that has USB connectors. The conventional computer system 10 could be a number of computer systems, including for example, a notebook computer or desk top computer. The conventional computer system 10 includes a host 12, a first USB connector 14, a USB hub 16, USB connectors 18 and 20 and a power supply 22. The host 12 includes the integrated circuits and, therefore, the processor (not explicitly shown) that operate the operating system (not explicitly shown) for the computer system 10. For example, the host 12 might include four INTEL™ integrated circuits. Thus, the host 12 might include INTEL™ processors which run a MICROSOFT™ operating system. The conventional computer system 10 also includes the USB connector 14. The conventional computer system 10 could include another USB connector (not explicitly shown) and operate as desired. Due to the popularity of USB connectivity, the conventional computer system 10 is desired to have a larger number of USB connectors. Consequently, the USB hub 16 that connects the host 12 to USB connectors 18 and 20 is provided. Thus, the USB hub 16 allows additional USB connectors 18 and 20 to be integrated into the computer system 10. In order to operate, the USB hub may connected to and be supplied with power from the power supply 22. Typically, the conventional computer system 10 includes the components 12, 14, 16, 18, 20 and 22 integrated into a housing.

25 Although the conventional computer system 10 functions, one of ordinary skill in the art will readily realize the conventional computer system 10 may use a higher amount of power than desired. For certain operating systems and processors, such as the MICROSOFT™ operating system and certain INTEL™ processors, use of a USB

WO 02/065264

PCT/US01/47259

device attached to a USB connector precludes the processor from entering a lowest power state, known as a C3 state. In other words, because of certain USB host implementations, if the operating system for the host 12 detects the presence of a USB device then the processor cannot enter its lowest power state. In the conventional computer system 10, and as required by USB specifications, the operating system in the host 12 considers the USB hub 16, which is integrated into the conventional computer system 10, to be a USB device. Consequently, a USB device is always detected, even when no external USB devices are utilized. As a result, processors in the host 12 will never be able to enter the lowest power state. The conventional computer system 10 may, therefore, consume more power than is desirable. This is a particular problem if the conventional computer system 10 is a computer system, such as a notebook, that has a mobile mode. In such a computer system, the power supply 22 includes a battery for supplying power to the conventional computer system 10 when in mobile mode. When in the mobile mode, it is desirable to allow the host 12 to enter a lowest power state in order to conserve battery power, for example when the host 12 is not actively being used. Because the processors in the host 12 cannot enter the lowest power state, the battery will discharge more rapidly. The battery may lose its charge, preventing the user from utilizing the conventional computer system 10 when desired.

Accordingly, what is needed is a system and method for providing a system that allows a computer system having a USB hub to manage power. The present invention addresses such a need.

Disclosure of Invention

The present invention provides a method and system for managing power in a computer system. The computer system includes a host. The method and system comprise providing a Universal Serial Bus (USB) hub, at least one USB connector and attach/removal detection logic. The at least one USB connector is coupled with the USB hub. The attach/removal detection logic is coupled with the USB hub. The attach/removal detection logic determines whether a USB device is connected to the at least one USB connector, logically decouples the USB hub from the host if the USB device is not connected to the at least one USB connector and logically couples the

WO 02/065264

PCT/US01/47259

USB hub to the host if the USB device is connected to the at least one USB connector.

According to the system and method disclosed herein, the present invention allows power to be managed in the computer system by allowing processors in the host to go to a lower power state.

5 **Brief Description of Drawings**

Figure 1 is a block diagram of a conventional computer system having a USB hub.

Figure 2 is a block diagram of one embodiment of a computer system in accordance with the present invention having a USB hub.

10 Figure 3 is a block diagram of a second embodiment of a computer system in accordance with the present invention having a USB hub.

Figure 4 is a more detailed block diagram of the second embodiment of a computer system in accordance with the present invention having a USB hub.

Best Mode for Carrying Out The Invention

15 The present invention relates to an improvement in computer systems. The following description is presented to enable one of ordinary skill in the art to make and use the invention and is provided in the context of a patent application and its requirements. Various modifications to the preferred embodiment will be readily apparent to those skilled in the art and the generic principles herein may be applied to other
20 embodiments. Thus, the present invention is not intended to be limited to the embodiment shown, but is to be accorded the widest scope consistent with the principles and features described herein.

25 A conventional computer system may include a host, a USB hub and multiple USB connectors integrated into a single unit. The host typically includes one or more integrated circuits, including at least one processor, that run an operating system ("OS") for the conventional computer system. Because USB devices enjoy increased popularity, the USB hub is coupled with the host. Coupled to the USB hub are multiple USB connectors that allow USB devices to be coupled to the conventional computer system. Although such a conventional computer system allows a larger

WO 02/065264

PCT/US01/47259

number of USB devices to be used with the conventional computer system, one of ordinary skill in the art will realize that the conventional computer system may not be able to adequately manage power. In particular, the conventional computer system, as required by USB specifications, considers the USB hub to be a USB device connected to the conventional computer system. Consequently, processors in the host of the conventional computer system cannot enter certain power states. As a result, the conventional computer system may consume more power than is desired.

The present invention provides a method and system for managing power in a computer system. The computer system includes a host. The method and system comprise providing a Universal Serial Bus (USB) hub, at least one USB connector and attach/removal detection logic. The at least one USB connector is coupled with the USB hub. The attach/removal detection logic is coupled with the USB hub. The attach/removal detection logic determines whether a USB device is connected to the at least one USB connector, logically decouples the USB hub from the host if the USB device is not connected to the at least one USB connector and logically couples the USB hub to the host if the USB device is connected to the at least one USB connector.

The present invention will be described in terms of certain components and OSs and particular numbers of components. However, one of ordinary skill in the art will readily recognize that this method and system will operate effectively for other components, other OSs and other numbers of components. In addition, for the purposes of clarity, many portions of the computer system in accordance with the present are omitted.

To more particularly illustrate the method and system in accordance with the present invention, refer now to Figure 2. Figure 2 is a high-level block diagram that depicts one embodiment of a computer system 100 in accordance with the present invention. The computer system 100 includes a host 102, a first USB connector 104, a USB hub 106, USB connectors 108 and 110 connected to the USB hub 106, a power supply 112 coupled with the USB hub 106, attach/removal detection logic 120 and connector 122. The host 102, the first USB connector 104, the USB hub 106, the USB connectors 108 and 110 and the power supply 112 are preferably substantially the same as the host 12, the first USB connector 14, the USB hub 16, the USB connectors 18 and

WO 02/065264

PCT/US01/47259

20 and the power supply 22 of the conventional system 10 depicted in Figure 1.

Referring back to Figure 2, the attach/removal detection logic 120 is coupled with the USB connectors 108 and 110 and with the power supply 112 and USB hub 108 through the connector 122. The attach/removal detection logic 120 detects
5 whether a USB device (not shown) is plugged into either of the USB connectors 108 and 110. The attach/removal detection logic 120 functions to logically decouple the USB hub 106 from the host 102 if a USB device is not connected any of the USB connectors 108 and 110. In addition, the attach/removal detection logic 120 also
10 logically couples the USB hub 106 to the host 102 if a USB device is coupled to any of the USB connectors 108 and 110. The attach/removal detection logic 120 does this by controlling the connector 122. In particular, the attach/removal detection logic 120 controls the connector 122 so that the connector 122 couples the USB hub 106 to the power supply 112 when a USB device is coupled to either of the USB connectors 108 and 110 and so that the connector 122 does not couple the USB hub 106 to the power
15 supply 112 when the USB device is not coupled to either of the USB connectors 108 and 110. Thus, power is only supplied to the USB hub 106 when one or more of the USB connectors 108 and 110 provided through the USB hub 106 is in use.

Using the attach/removal detection logic 120, the computer system 100 can better manage power. The operating system of the host 102 can only recognize the
20 USB hub 106 if power is supplied to the USB hub 106. Because the attach/removal detection logic 120 and the connector 122 ensure that the power supply 112 is connected to the USB hub 106 only when one or more of the USB connectors 108 and 110, the operating system can only recognize the USB hub 106 when a USB device is connected to one or more of the USB connectors 108 and 110. In other words, the
25 USB hub 106 is logically decoupled from the host 102 when a USB device is not coupled to either of the USB connectors 108 and 110. Similarly, the USB hub 106 is logically coupled to the host when a USB device is connected to one or more of the USB connectors 108 and 110. This is true even though the USB hub 106 remains physically connected to the host 102 at all times. Thus, the operating system for the
30 host 102 only considers the USB hub 106 to be a USB device coupled to the host 102 when one or more of the USB connectors 108 and 110 are in use. When these

WO 02/065264

PCT/US01/47259

connectors are not in use, therefore, the processors for the host 102 can enter a lowest power state. Thus, power will not be utilized unnecessarily due to the presence of the USB hub 106. Therefore, power for the computer system 100 can be better managed.

Figure 3 is a block diagram of a second embodiment of a computer system 100' in accordance with the present invention having a USB hub. The computer system 100' includes analogous components to those in the computer system 100. Consequently, these items are labeled similarly. However, for clarity, certain components are not depicted. The computer system 100' includes a host 102', a USB connector 104' connected to the host 102', a USB hub 106', and USB connectors 108' and 110' coupled to the USB hub 106'. The computer system 100' also includes attach/removal detection logic 120' and connector 122'. However, in the computer system 100', the connector 122' is coupled between the host 102' and the USB hub 106'. The attach/removal detection logic 120' still logically decouples the USB hub 106' from the host 102' if a USB device is not connected any of the USB connectors 108' and 110'. The attach/removal detection logic 120' also logically couples the USB hub 106' to the host 102' if a USB device is coupled to any of the USB connectors 108' and 110'. The attach/removal detection logic 120' performs these functions by controlling the connector 122'. In particular, the attach/removal detection logic 120' controls the connector 122' so that the connector 122' couples the USB hub 106' to the host 102' when a USB device is coupled to either of the USB connectors 108' and 110'. In addition, the attach/removal detection logic 120' controls the 122' so that the connector 122' does not couple the USB hub 106' to the host 102' when the USB device is not coupled to either of the USB connectors 108' and 110'.

Using the attach/removal detection logic 120', the computer system 100' can better manage power. The operating system of the host 102' can only recognize the USB hub 106' if the host 102' is coupled to the USB hub 106'. Because the attach/removal detection logic 120' and the connector 122' couples the USB hub 106' to the host 102' only when one or more of the USB connectors 108' and 110', the operating system can only recognize the USB hub 106 when a USB device is connected to one or more of the USB connectors 108' and 110'. In other words, the

WO 02/065264

PCT/US01/47259

USB hub 106' is logically decoupled from the host when a USB device is not coupled to either of the USB connectors 108' and 110'. Similarly, the USB hub 106' is logically coupled to the host when a USB device is connected to one or more of the USB connectors 108' and 110'. Thus, the operating system for the host 102' only
5 considers the USB hub 106' to be a USB device coupled to the host 102' when one or more of the USB connectors 108' and 110' are in use. When these connectors are not in use, therefore, the processors for the host 102' can enter a lowest power state. Thus, power will not be utilized unnecessarily due to the presence of the USB hub 106'. Therefore, power for the computer system 100' can be better managed.

10 Figure 4 is a more detailed block diagram of the second embodiment of a computer system 100'' in accordance with the present invention having a USB hub 106''. The computer system 100'' includes analogous components to those in the computer system 100. Consequently, these items are labeled similarly. However, for clarity, certain components are not depicted. The computer system 100'' includes
15 processors 102'' which would reside in a host for the computer system 100'', a USB hub 106'', USB connectors 108'' and 110''. The computer system 100'' also includes attach/removal detection logic 120'' and connector 122''. Furthermore, the computer system 100'' includes a transient suppressor 124. The transient suppressor 124 is used to prevent damage due to electrostatic discharge when a USB device (not shown) is
20 hot attached to one of the connectors 106'' and 108''. The attach removal detection logic includes integrated circuits 126 and 128 and logic gates 130, 132 and 134. The connector 122'' is a FET. Thus, the connector 122'' is not a connector in the traditional sense of the word in that the connector 122'' does not physically decouple the USB hub 106'' from the processors 102''. Instead, the connector 122'' is a
25 connector in the sense that it allows the USB hub 106'' to be logically coupled or decoupled from the processor 102''. When a USB device is connected to a USB connector 108'' or 110'', the attach/removal detection logic 120'' provides a signal (H8USBON) that is on. When this signal is on, the FET 122'' is turned on. Thus, the line 121 between the processors 102'' and the USB hub 106'' is driven high when a
30 USB device is connected to one of the connectors 108'' or 110''. As a result, the USB hub 106'' is connected to the processors 102'' only when the USB connector 108'' or

WO 02/065264

PCT/US01/47259

110'' is in use. Thus, the processors 102'' only recognize the USB hub 106'' as a USB device when the USB connector 108'' or 110'' is being used. At other times, the processors 102'' behave as though the USB hub 106'' is not present in the computer system 100''. Therefore, the processors 102'' can enter a lowest power state when the
5 USB connectors 108'' and 110'' are not in use. Thus, power can be better managed in the computer system 100''.

A method and system has been disclosed for managing power in a system having an internal USB hub. Although the present invention has been described in accordance with the embodiments shown, one of ordinary skill in the art will readily
10 recognize that there could be variations to the embodiments and those variations would be within the spirit and scope of the present invention. Accordingly, many modifications may be made by one of ordinary skill in the art without departing from the spirit and scope of the appended claims.

Industrial Applicability

15 The invention has an application to managing the requirement for power in an electrical system of communication.

WO 02/065264

PCT/US01/47259

Claims

What is claimed is:

- 1 1. A system for managing power in a computer system, the computer system
2 including a host, the system comprising:
3 a Universal Serial Bus (USB) hub;
4 at least one USB connector coupled with the USB hub; and
5 attach/removal detection logic coupled with the USB hub, the attach/removal
6 detection logic for determining whether a USB device is connected to the at least one
7 USB connector, logically decoupling the USB hub from the host if the USB device is
8 not connected to the at least one USB connector and logically coupling the USB hub
9 to the host if the USB device is connected to the at least one USB connector.
- 1 2. The system of claim 1 wherein the attach/removal detection logic is
2 coupled with the host and wherein the attach/removal detection logic disconnects the
3 USB hub from the host if the USB device is not connected to the at least one USB
4 connector.
- 1 3. The system of claim 2 wherein the attach/removal detection logic
2 provides a first signal when the USB device is not connected to the at least one USB
3 connector and a second signal when the USB device is connected to the at least one
4 USB connector, the system further comprising:
5 a connector coupled with the host, the attach/removal detection logic and the
6 USB hub, the connector for connecting the USB hub to the host in response to the
7 first signal and for disconnecting the USB hub from the host in response to the second
8 signal.
- 1 4. The system of claim 1 wherein the computer system further includes a
2 power supply coupled with the USB hub and wherein the attach/removal detection
3 logic disconnects the USB hub from the power supply if the USB device is not
4 connected to the at least one USB connector.

WO 02/065264

PCT/US01/47259

1 5. The system of claim 4 wherein the attach/removal detection logic
2 provides a first signal when the USB device is not connected to the at least one USB
3 connector and a second signal when the USB device is connected to the at least one
4 USB connector, the system further comprising:

5 a connector coupled with the power supply, the attach/removal detection logic
6 and the USB hub, the connector for connecting the USB hub to the power supply in
7 response to the first signal and for disconnecting the USB hub from the power supply
8 in response to the second signal.

1 6. The system of claim 1 wherein the computer system is allowed to enter
2 a lowest power state when the device is not connected to the at least one USB
3 connector.

1 7. A method for controlling power in a computer system including a host,
2 a Universal Serial Bus (USB) hub coupled with the host and at least one USB connector
3 coupled with the USB hub, the method comprising the steps of:

4 (a) determining whether a USB device is connected to the at least one USB
5 connector;

6 (b) logically decoupling the USB hub from the host if the USB device is
7 not connected to the at least one USB connector; and

8 (c) logically coupling the USB hub to the host if the USB device is
9 connected to the at least one USB connector.

1 8. The method of claim 7 wherein the determining step (a), the logically
2 decoupling step (b) and the logically coupling step (c) are performed using
3 attach/removal detection logic.

1 9. The method of claim 8 wherein the logically decoupling step (b)
2 further includes the step of:

3 (b1) disconnecting the USB hub from the host if the USB device is not
4 connected to the at least one USB connector.

WO 02/065264

PCT/US01/47259

1 10. The method of claim 9 wherein the disconnecting step (b1) further
2 includes the steps of:

3 (b1)(i) providing a first signal when the USB device is not connected to the at
4 least one USB connector and a second signal when the USB device is connected to the
5 at least one USB connector using the attach/removal detection logic, the
6 attach/removal detection logic being coupled with the host and the at least one
7 connector; and

8 (b1)(ii) using a connector coupled with the host, the attach/removal detection
9 logic and the USB hub to connect the USB hub to the power supply in response to the
10 first signal and for disconnect the USB hub from the power supply in response to the
11 second signal.

1 11. The method of claim 8 wherein the computer system further includes a
2 power supply coupled with the USB hub and wherein the logically decoupling step (b)
3 further includes the step of:

4 (b1) disconnecting the USB hub from the power supply if the USB device
5 is not connected to the at least one USB connector.

1 12. The method of claim 11 wherein the disconnecting step (b1) further
2 includes the steps of


3 (b1i) providing a first signal when the USB device is not connected to the at
4 least one USB connector and a second signal when the USB device is connected to the
5 at least one USB connector using the attach/removal detection logic, the
6 attach/removal detection logic being coupled with the power supply and the at least
7 one USB connector; and

8 (b1ii) using a connector coupled with the power supply, the attach/removal
9 detection logic and the USB hub to connect the USB hub to the power supply in
10 response to the first signal and for disconnect the USB hub from the power supply in
11 response to the second signal.

WO 02/065264

PCT/US01/47259

1 / 3

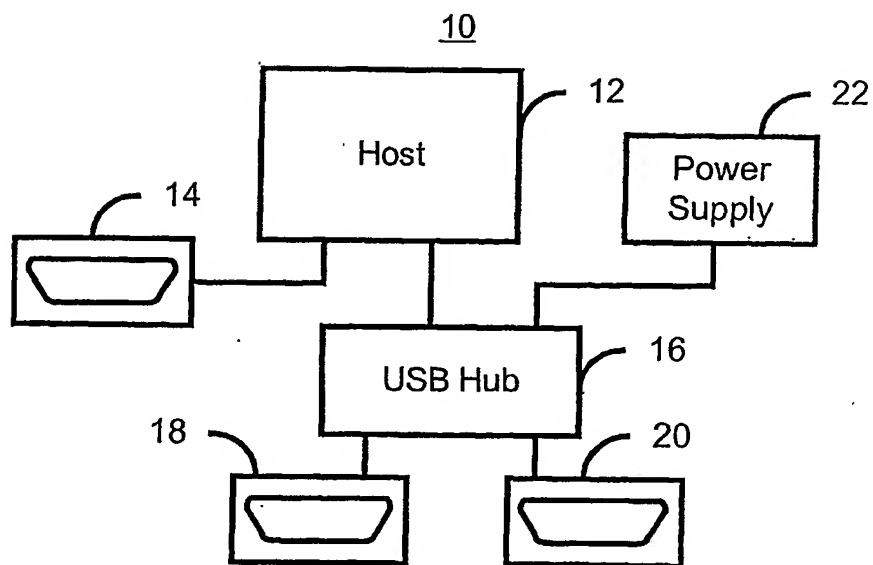

Prior Art
Figure 1

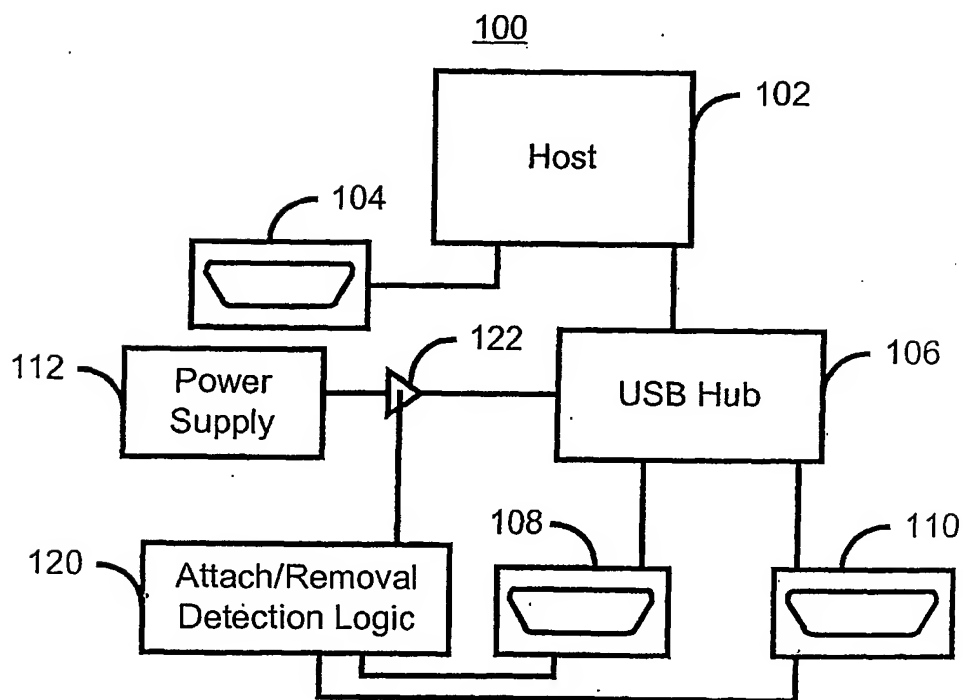


Figure 2

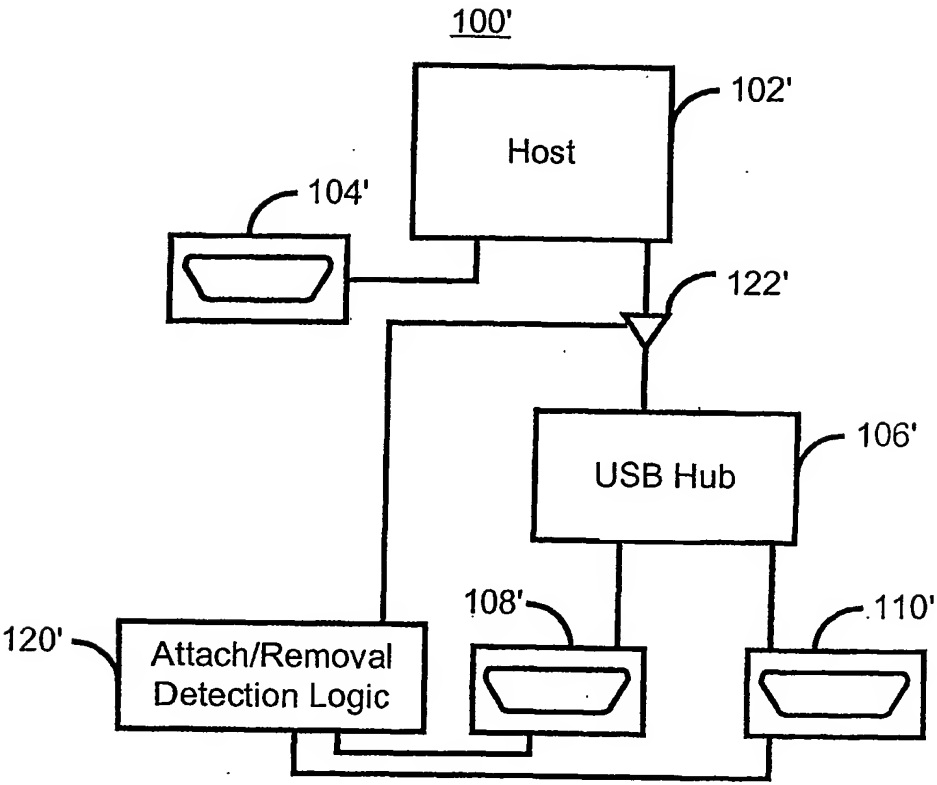


Figure 3

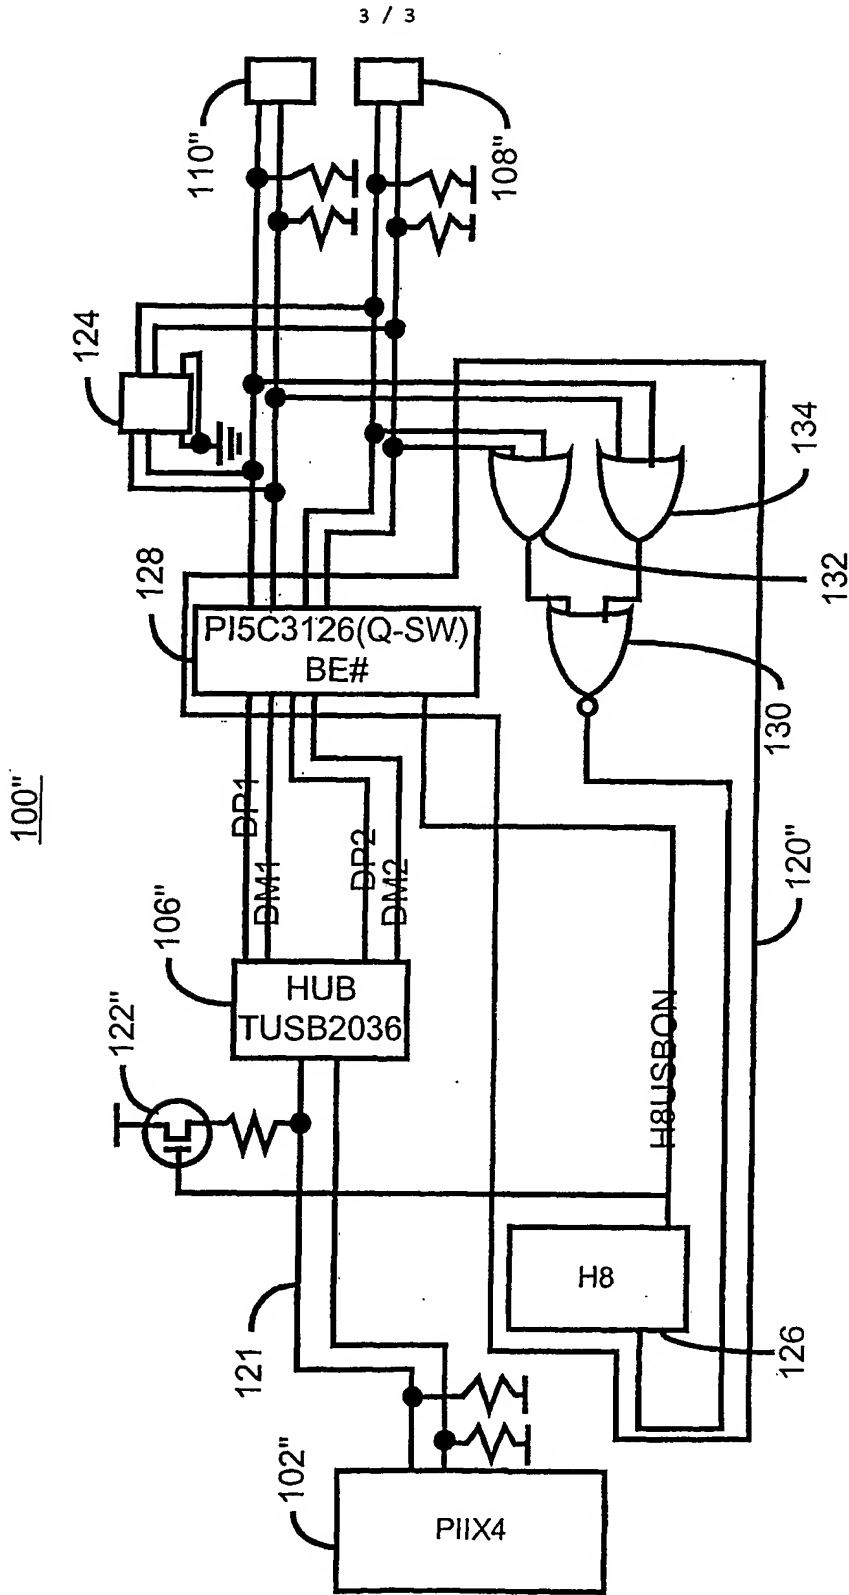


Figure 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US01/47259

A. CLASSIFICATION OF SUBJECT MATTER												
IPC(7) : G06F 1 32, 13 10												
US CL : 713.300, 320, 340; 710.15, 17												
According to International Patent Classification (IPC) or to both national classification and IPC												
B. FIELDS SEARCHED												
Minimum documentation searched (classification system followed by classification symbols) U.S. : 713/300, 320, 340; 710/15, 17												
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched												
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EAST												
C. DOCUMENTS CONSIDERED TO BE RELEVANT												
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.										
Y, P	US 6,279,060 B1 (LUKE et al) 21 August 2001 (12.08.2001), see the entire document.	1-12										
Y	US 4,974,152 A (GUIFFANT et al) 27 November 1990 (27.11.1990), see the entire document.	1-12										
Y	US 4,635,186 A (OMAN et al) 06 January 1987 (06.01.1987), col. 13, lines 43-53.	1 and 7										
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.												
* Special categories of cited documents: <table border="0"> <tr> <td>-A- document defining the general state of the art which is not considered to be of particular relevance</td> <td>-T- later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>-I- earlier application or patent published on or after the international filing date</td> <td>-X- document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> </tr> <tr> <td>-L- document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td> <td>-Y- document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td> </tr> <tr> <td>-O- document referring to an oral disclosure, use, exhibition or other means</td> <td>-&- document member of the same patent family</td> </tr> <tr> <td>-P- document published prior to the international filing date but later than the priority date claimed</td> <td></td> </tr> </table>			-A- document defining the general state of the art which is not considered to be of particular relevance	-T- later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	-I- earlier application or patent published on or after the international filing date	-X- document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	-L- document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	-Y- document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	-O- document referring to an oral disclosure, use, exhibition or other means	-&- document member of the same patent family	-P- document published prior to the international filing date but later than the priority date claimed	
-A- document defining the general state of the art which is not considered to be of particular relevance	-T- later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention											
-I- earlier application or patent published on or after the international filing date	-X- document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone											
-L- document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	-Y- document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art											
-O- document referring to an oral disclosure, use, exhibition or other means	-&- document member of the same patent family											
-P- document published prior to the international filing date but later than the priority date claimed												
Date of the actual completion of the international search 28 February 2002 (28.02.2002)		Date of mailing of the international search report 11 APR 2002										
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703)305-3230		Authorized officer Thomas C. Lee Telephone No. (703) 305-9717										